

Technical Datasheet

Cabletool Part.N°.: 240001




Technical Data:

Dimensions: Ø 50/15, L 118 mm
Weight: approx. 53 g
Material: PA 2200
Drill: Ø 2, approx. 14 mm

Step 2

Screw in the 4mm plug:

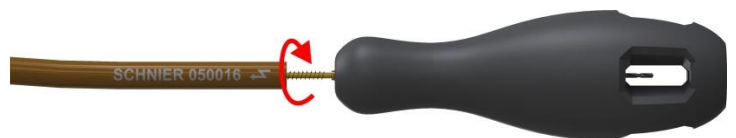

Application:

ATTENTION! Only for high voltage cables 050016 and 050019.

To install hv-plugs or ring eyelets, the conductor of the hv-cable must be predrilled.

On the side of the cabletool there is a hexagon socket for the insertion of the 4mm plug type HAN 11/02. The cable plug can thus be easily screwed into the HS cable.

Step 1

Predrill the cable:



Drill the wire of the hv-cable approx. 14mm deep (up to stop)